

*GAX Series  
Right Angle Ganged Jack*

**Features**



- Available in 6 and 8 Position Housings
- Right Angle Version
- Ribbed Pin Guides
- Metal Locking Brackets
- CSA/NRTL Certified File No. LR78160

**Performance Specifications**

**Materials and Finish**

**Housing Material**

Thermoplastic, UL 94V-0 Rated, Gray Color

**Contact Material**

Phosphor Bronze

**Electrical Characteristics**

**Insulation Resistance**

500 Megohms Min.

**Dielectric Withstanding Voltage**

1000V AC RMS for 1 Minute

**Contact Resistance**

20 milliohms Max.

**Current Rating**

1.5A

**Voltage Rating**

125V DC


**MODULAR JACKS AND PLUGS**

**GAX Series**

**Documentation & Ordering Information**


**Kycon Part #**

**Part Number Builder**

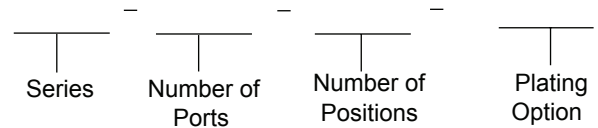

**Series**

GAX - Right Angle P.C.B. Mount

**Number of Ports**

- 2 - 2 Port ( Available with 6 and 8 Positions)
- 3 - 3 Port ( Available with 6 and 8 Positions)
- 4 - 4 Port ( Available with 6 and 8 Positions)
- 5 - 5 Port ( Available only with 6 Positions)
- 6 - 6 Port ( Available only with 6 Positions)
- 7 - 7 Port ( Available only with 6 Positions)
- 8 - 8 Port ( Available only with 6 Positions)

**Number of Positions/Contacts**

- 62 - 6 Positions/ 2 Contacts
- 64 - 6 Positions/ 4 Contacts
- 66 - 6 Positions/ 6 Contacts
- 88 - 8 Positions/ 8 Contacts


**Plating Option**

- Blank - Gold Flash
- 50 - 50µ" Gold Plating

Contact Kycon for more options.


\*See next page for dimensions

**GAX-x-6x Series**  
Dimensions in mm

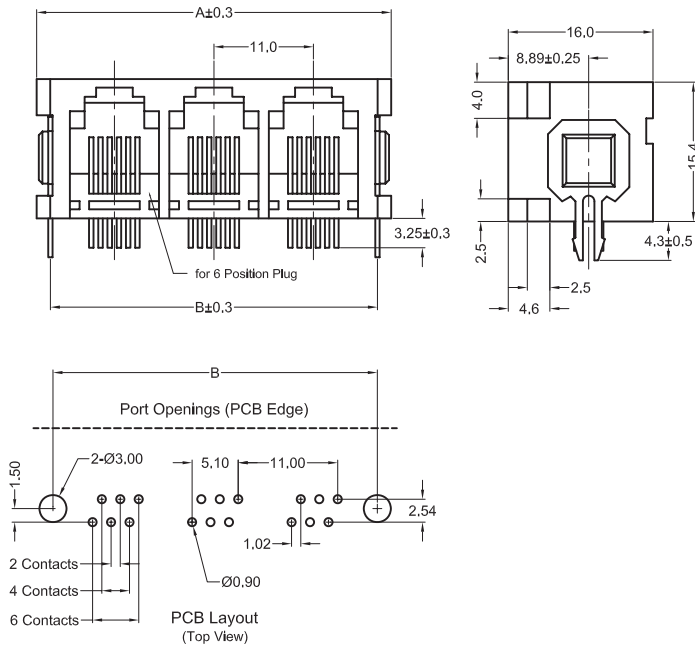

Dimensions [mm]	Number of Ports						
	2	3	4	5	6	7	8
A	28.0	39.0	50.0	61.0	72.0	83.0	94.0
B	24.8	35.8	46.8	57.8	68.8	79.8	90.8

**GAX-x-8x Series**  
Dimensions in mm

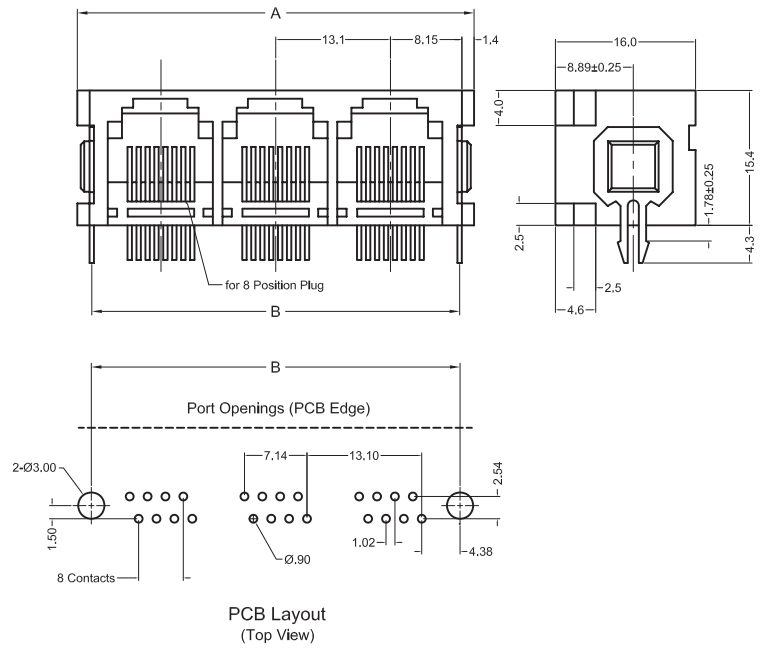

Dimensions [mm]	Number of Ports		
	2	3	4
A	32.3	45.3	58.5
B	28.9	42.0	55.1